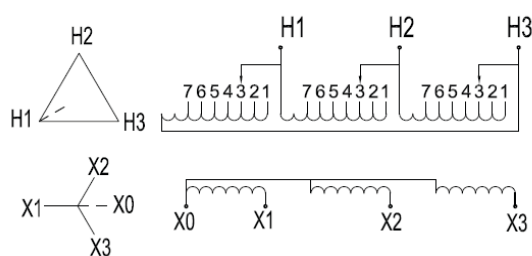


HIGH EFFICIENCY DOE 2016 COMPLIANT


Three phase 480 Volts Delta Primary 208Y/120 Volts Secondary 60Hz. 150 °C COPPER

kVA	Catalog Number	Case Style	Approx. Dimensions(Inches)			Wiring Diagram	Approx. Weight (Lbs.)
			Width	Depth	Height		
15	HE3015ABCU	E1	19.4	20.2	21.5	W1	280
30	HE3030ABCU	E2	23.9	25	28.75	W1	400
45	HE3045ABCU	E2	23.9	25	28.75	W1	470
75	HE3075ABCU	E3	26	25	38	W1	700
112.5	HE3112ABCU	E4	32	29.5	41	W1	1080
150	HE3150ABCU	E4	32	29.5	41	W1	1190
225	HE3225ABCU	E5	39.5	34	51.5	W1	1800
300	HE3300ABCU	E5	39.5	34	51.5	W1	2100
500	HE3500ABCU	E7	51.5	43.4	66	W2	3300
750	HE3750ABCU	E7	51.5	43.4	66	W2	4500

(W1) WIRING DIAGRAM

SCHEMATIC	CONNECTIONS			
	% Voltage	Primary Volts	Connect lines to	Inter-connect
	105. 0%	504	H1, H2, H3	1
	102. 5%	492	H1, H2, H3	2
	100. 0%	480	H1, H2, H3	3
	97. 5%	468	H1, H2, H3	4
	95. 0%	456	H1, H2, H3	5
	92. 5%	444	H1, H2, H3	6
	90. 0%	432	H1, H2, H3	7
	Secondary Volts		Connect lines to	
	208		X1, X2, X3	
120		X1, X0 X2, X0 X3, X0		

(W2) WIRING DIAGRAM

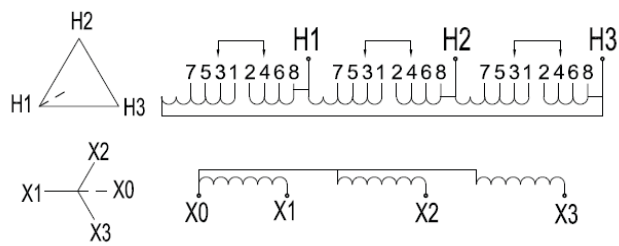SCHEMATIC	CONNECTIONS			
	% Voltage	Primary Volts	Connect lines to	Inter-connect
	105. 0%	504	H1, H2, H3	1-2
	102. 5%	492	H1, H2, H3	2-3
	100. 0%	480	H1, H2, H3	3-4
	97. 5%	468	H1, H2, H3	4-5
	95. 0%	456	H1, H2, H3	5-6
	92. 5%	444	H1, H2, H3	6-7
	90. 0%	432	H1, H2, H3	7-8
	Secondary Volts		Connect lines to	
	208		X1, X2, X3	
120		X1, X0 X2, X0 X3, X0		